


**NPH**

## SSR DIN Rail Mount to 30 Amps AC @ 30°C Ambient Single Phase/Three Phase

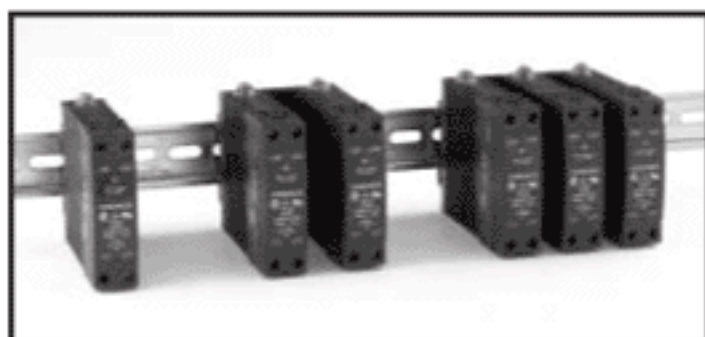


### FEATURES:


- Standard relays approved to the following: UL, CSA, and CE
- Finger-safe cover standard
- Zero voltage switching standard
- Optional 24 VAC input available (-E)
- Optional Transient protection available (-P)

PART NO.		INPUT RANGE	LOAD CURRENT (amps AC)	LINE VOLTAGE RANGE (VAC)	TRANSIENT OVER VOLTAGE
HKD2410-	-1 (single phase)	4 - 32 Vdc	.04 - 10	24 - 280 VAC	600 V <sub>pk</sub>
HKD2420-			.04 - 20		
HKD2430-			.04 - 30		
HKA2410-	-2 (3 phase/ 2 pole)	90 - 280 Vac	.04 - 10	24 - 280 VAC	600 V <sub>pk</sub>
HKA2420-			.04 - 20		
HKA2430-			.04 - 30		
HKD4810-	-3 (3 phase/ 3 pole)	4 - 32 Vdc	.04 - 10	48 - 530 VAC	1200 V <sub>pk</sub>
HKD4820-			.04 - 20		
HKD4830-			.04 - 30		
HKA4810-	90 - 280 Vac	.04 - 10	.04 - 20	48 - 530 VAC	600 V <sub>pk</sub>
HKA4820-					
HKA4830-					


Three Phase, 3 Pole

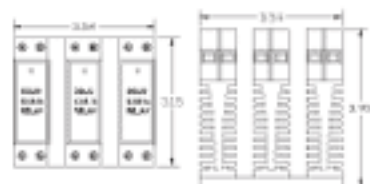

Three Phase, 2 Pole



Single Phase

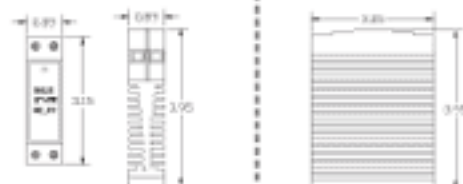**NPH**

### National Plastic Heater Sensor & Control Co.

phone: 416.491.8436 toll free: 1.877.674.9744 fax: 416.491.2433  
Toronto, Ontario Canada e-mail: sales@nphheaters.com website www.nphheaters.com