


NPH


Panel Mount Fan Cooled Solid State Contactors to 100 Amps, 480 VAC - 3 Phase

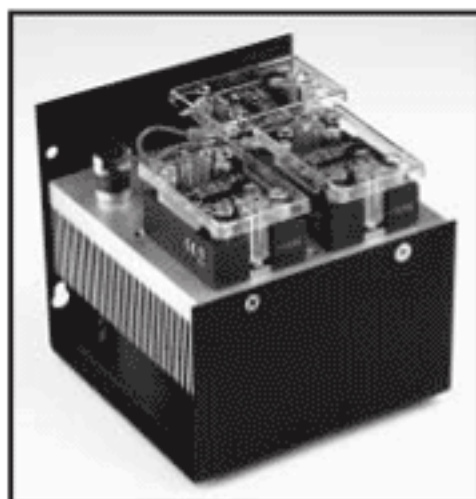

FEATURES:

- Fits in 5 inch cube
- Replaces 100 amp 3 pole mercury contactors
- Ball bearing fan standard; 50/60 hz
- 90°C over temperature detect standard
- Relays & fan: UL, CSA, TUV/VDE, CE
- MOV standard
- Finger safe covers standard
- Optional DIN rail mount available (-DIN)
- Zero cross turn-on
- 600 VAC available

PART NO. Basic Part	Fan Voltage	CONTROL VOLTAGE	LOAD CURRENT (amps AC)	LINE VOLTAGE RANGE (VAC)	TRANSIENT OVER VOLTAGE	APPLICATION NOTES
HBC-D125HDF-	1 (120VAC)	3 - 32 VDC	.100 - 100 amp	48 - 530 VAC	1200 V _{pk}	• 2 leg control
HBC-T125HDF-	2 (240 VAC)					• 3 leg control
HBC-D125HAF-	3 (24 VDC)	90-280 VAC				• 2 leg control
HBC-T125HAF-						• 3 leg control

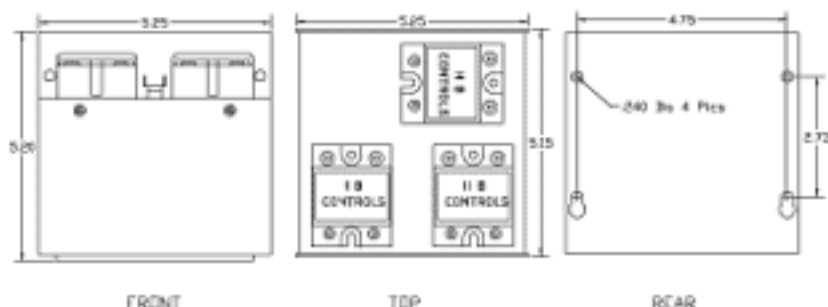

NOTES:

- 1) All dimensions in inches
- 2) Consult NPH Heaters for application information

NPH
National Plastic Heater Sensor & Control Co.

phone: 416.491.8436 toll free: 1.877.674.9744 fax: 416.491.2433
 Toronto, Ontario Canada e-mail: sales@nphheaters.com website www.nphheaters.com