


**NPH**


# DIN Rail Mount Intelligent Control Solid State Relays to 100 Amps @ 40°C Ambient

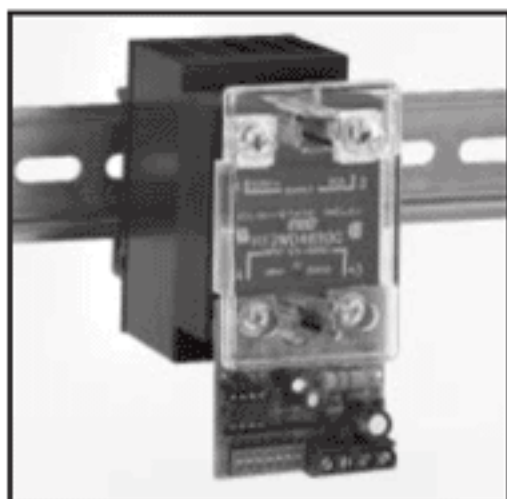

## FEATURES:

- Finger-safe cover standard
- DIN rail mount
- DIP Switch selectable control of 1-135  $\Omega$ , 4-20 MA, 0-5V, 0-10 V and potentiometer command signals
- Four cycle times: 200 MS, 1 sec, 10 sec, 100 sec
- Integral LED
- 600 VAC available

PART NO.	CONTROL INPUT	LOAD CURRENT	LINE VOLTAGE	TRANSIENT OVERVOLTAGE
HRT-25DS	0-135 $\Omega$ 4-20 MA 0-5 V 0-10 V Potentiometer	.04-15 A	24-280 VDC	600 V <sub>pk</sub>
HRT-25HDS			48-530 VAC	1200 V <sub>pk</sub>
HRT-50DA		.04-30 A	24-280 VDC	600 V <sub>pk</sub>
HRT-50HDA			48-530 VAC	1200 V <sub>pk</sub>
HRT-90HDL		.04-50 A	48-530 VAC	1200 V <sub>pk</sub>
HRT-90HDK				
HRT-90HDN		.04-75 A	48-530 VDC	1200 V <sub>pk</sub>
HRT-90HDG				
HRT-125HDG	.04-100 A			

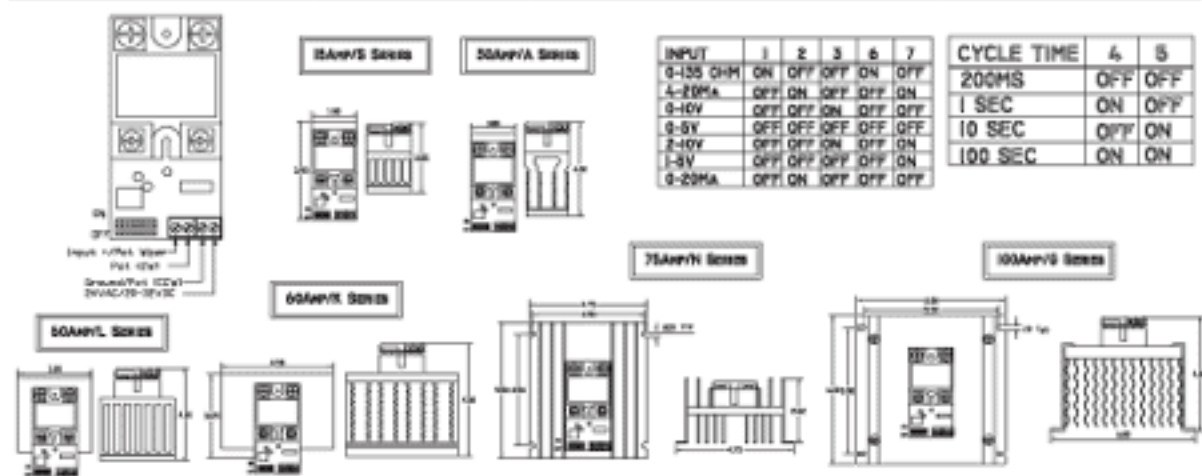**NPH**

## National Plastic Heater Sensor & Control Co.

phone: 416.491.8436 toll free: 1.877.674.9744 fax: 416.491.2433

Toronto, Ontario Canada e-mail: sales@nphheaters.com website www.nphheaters.com