


NPH

DIN Mount Heat Sinks for Panel Mount Relays



HBC-098

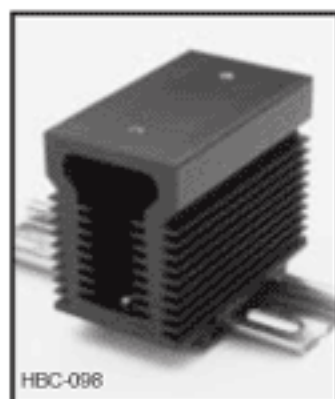


HBC-323

FEATURES:


- Rugged 35mm DIN Clip (patent pending)
- All Heat Sinks black anodized
- Fully assembled & tapped (8-32)
- Heat sink black anodized aluminum
- Optional finger safe cover available (HBC-013); adds approx. 0.4" to assembly height
- Heat sinks may be used with listed Crydom products

CRYDOM SERIES	INPUT RANGE	OUTPUT VOLTAGE	OUTPUT CURRENT
D12, D24	3 - 32 VDC	24 - 140 VAC/	Call for details
A12, A 24	90 - 280 Vrms	24 - 280 VAC	
D24 (high current)	3 - 32 VDC	24 - 280 Vrms	
A24 (high current)	90 - 280 Vrms		
HA	90 - 280 Vrms	90 - 280 Vrms	
HD	3 - 32 VDC		
NTA	90 - 140 Vrms		
NTD	3 - 32 VDC	24 - 280 VAC	
CS	3.5 - 32 VDC		
H12	4 - 32 VDC		
H12	90 - 140 Vrms		
HD60	3 - 32 VDC	48 - 660 VAC	
HA60	90 - 280 Vrms		
SMR			
SMR-6	6 - 32 VDC		
DUAL	4 - 32 VDC	24 - 530 VAC	
QUAD		24 - 280 VAC	
PCV	0 - 10V/4 - 20 MA	100 - 240 VAC	
RPC	POT	90 - 480 VAC	
B2T/B2			
B48-2T/B48-2	SCR/Diode Module		
M50			

HBC-098

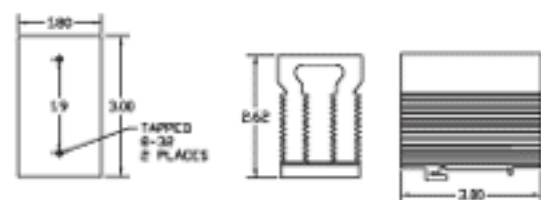

HBC-323

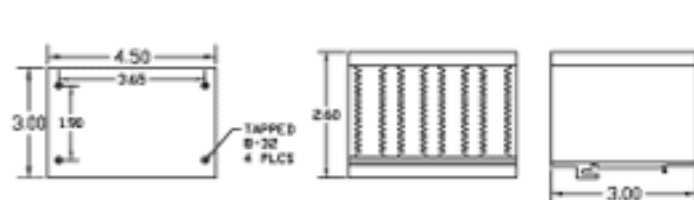**NPH****National Plastic Heater Sensor & Control Co.**

phone: 416.491.8436 toll free: 1.877.674.9744 fax: 416.491.2433

Toronto, Ontario Canada e-mail: sales@nphheaters.com website www.nphheaters.com